Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 220388 (SLW05L-12)

MEAN WELL

SWITCHING POWER SUPPLY

ISO-9001 CERTIFIED MANUFACTURER

SLW05L SERIES

- .2:1 WIDE INPUT RANGE
- .REGULATED DC OUTPUT
- .1000VDC I/O ISOLATION
- .3000VDC ISOLATION IS AVAILABLE
- .INPUT PI NETWORK FILTER
- .INDUSTRY STANDARD PACKAGE
- .FIVE-SIDED SHIELD OF METAL CASE
- .NO EXTERNAL COMPONENTS REQUIRED
- .HIGH PERFORMACE / LOW PRICE
- .SHORT CIRCUIT PROTECTION
- .100% BURN-IN TEST
- .1 YEAR WARRANTY

MODEL / SPECIFICATION	SLW05L-12	SLW05L-15
DC OUTPUT VOLTAGE	12V	15V
OUTPUT VOLTAGE ACCURACY	±2%	
OUTPUT RATED CURRENT	417mA	333mA
OUTPUT CURRENT RANGE	41.7-417mA	33.3-333mA
RIPPLE & NOISE	100mVp-p (max.)	
LINE REGULATION	±0.2%	±0.2%
LOAD REGULATION	±0.5%	±0.5%
DC OUTPUT POWER	5W	5W
EFFICIENCY	70%	72%
SWITCHING FREQUENCY	50KHz min.	
INPUT VOLTAGE RANGE	4.5~9VDC	
INPUT CURRENT	1.42A max.	
SHORT CIRCUIT PROTECTION	CONTINOUS	
OVER VOLTAGE PROTECTION	----------	
TEMP. COEFFICIENT	±0.03% / ° C (0~50° C)	
ISOLATION VOLTAGE	I/P-O/P:1KVDC MIN.	
ISOLATION RESISTANCE	I/P-O/P:100M Ohms MIN. @500VDC	
ISOLATION CAPACITANCE	---------	
WORKING TEMP., HUMIDITY	-15° C~+60° C, 20%~90% RH (NO DERATING); 80% LOAD @ 71° C	
STORAGE TEMP., HUMIDITY	-25° C~+85° C, 10%~95% RH	
DIMENSION	2"*1"*0.44"	
WEIGHT	31g	
CASE METERIAL	FIVE-SIDED SHIELD OF METAL CASE	

MECHANISM AND PIN CONFIGURATION

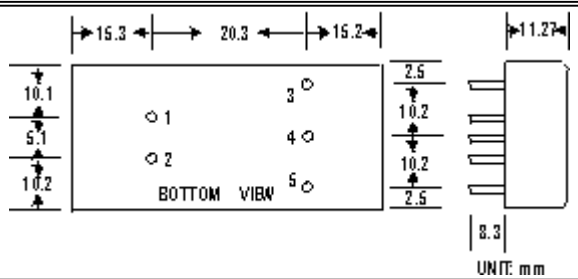

Pin no.	Output
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

NOTE :
1. ALL PARAMETERS ARE SPECIFIED AT RATED INPUT, RATED LOAD, 25° C 70% RH. AMBIENT.
2. RIPPLE & NOISE ARE MEASURED AT 20MHz BY USING A 12" TWISTED PAIR TERMINATED WITH A 0.1uF & 47uF CAPACITOR.
3. LINE REGULATION IS MEASURED FROM LOW LINE TO HIGH LINE AT RATED LOAD.
4. LOAD REGULATION IS MEASURED FROM 20% TO 100% RATED LOAD.

2003-02-10